

NOTES:

- ALL WORKS AND MATERIALS TO BE IN ACCORDANCE WITH FNQROC DEVELOPMENT MANUAL GUIDELINES AND SPECIFICATIONS
- 2. REFER TO THE FOLLOWING FNQROC STANDARD DRAWINGS:

S1000F - CONCRETE KERB & CHANNEL

S1016C - KERB RAMP

S1035D - PATHS/ BIKEWAYS

- 3. ALL SIGNAGE & PAVEMENT MARKING TO BE INSTALLED IN ACCORDANCE WITH AS 1742 MANUAL OF UNIFORM TRAFFIC DEVICES.
- LOCATION OF ALL EXISTING SERVICES TO BE CONFIRMED PRIOR TO CONSTRUCTION BY CONTRACTOR THROUGH LIAISION WITH RELEVANT AUTHORITIES.
- 5. WHERE POSSIBLE EXISTING TREES ARE TO BE RETAINED.

DESCRIPTION


- ACCESSIBLE PARKING BAYS TO BE IN ACCORDANCE WITH AS 2890.6.
- LINEMARKING SHOWN IN DETAILS UNO.

0 N.P 21/04/20 FOR CONSTRUCTION

A N.P 15/04/20 PRELIMINARY ISSUE

LINEMARKING	AND	SIGNAGE	PLAN
S			

	LINEMARKING DIMENSIONS							
TYPF	DESCRIPTION	LENGTH	GAP	WIDTH	COLOUR			
ITPL	DESCRIPTION	(mm)	(mm)	(mm)				
GWL	GIVEWAY LINE	600	600	300	WHITE			
SU	CONTINUITY LINE	900	600	100	WHITE			
ОМ	OUTLINE	-	-	150	WHITE			
PB	PARKING BAYS	_	_	100	WHITE			

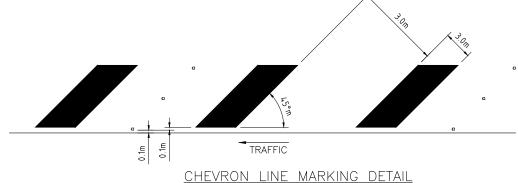

CHEVRON LINE MARKING DETAIL

7.	LIN	EMARKII	NG SHOWN IN DETAILS UNO.				Ţ	SCALE IN METRES (1 : 300	FULL SIZE A1)
				HORIZ. DATU	и м	GA	CERTIFICATION		
				VERT. DATUM	A	HD	/A	M. LANCINI RPEQ 18786	(NA
							COPYRIGHT (C)		1 17/

DESIGN

DRAWN

INI RPEQ 18786	MAI
not to be used or NGINEERS PTY ig are electronically r the purpose for ocument issued for ocument of and r scale. Do not scale	Engineers

These designs and drawings are co reproduced without the written pern LTD (ACN 636 773 781). The conte

21/04/20

21/04/20 Information approved. from this of

N.P

N.P

MAL ENGINEERS

m 0400 478 070 michael.lancini@malengineers.com.au

DOUGLAS SHIRE COUNCIL	SCALE	1:30	0 (A1)
TEAMSTERS PARK, CRAIGLIE (LOT 108 ON SR538)	SHEET	SHEET	2 OF 2
PROPOSED CARPARK UPGRADE		A 0	
LINEMARKING & SIGNAGE PLAN	DRG No.	Q200:	23-002